




USB Droop Test Fixture

Part No.: USB-TF-Droop

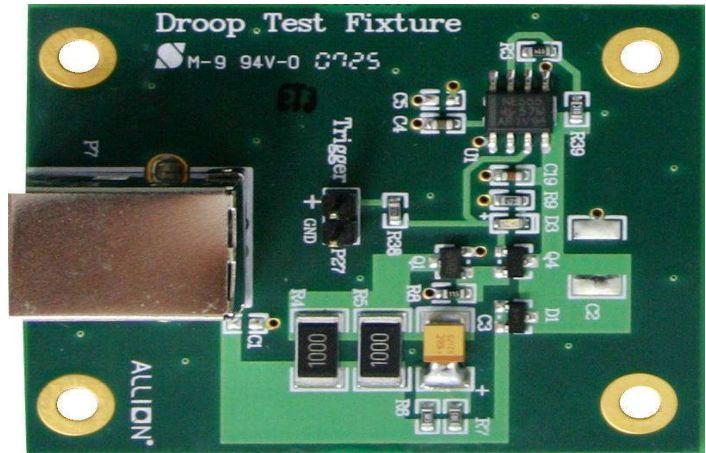

Application

- Design for System and HUB Drop Test
- Related with “**USB-IF Full and Low Speed Electrical and Interoperability Compliance Test Procedure**” Revision 1.3 Section B.2.3
- Please don't host Droop fixture with Hub or System over 5 minutes, resistance may become un-stable on high temperature
- Please don't touch resistance area to avoid scald

Specification

- 264mm x 50mm x 1.4mm
- Standard USB Type B connector
- Operating Temperature 0° ~ 70° C
- Support 100mA Loading with timer (Base 5V USB power source)

Contact Information:

Fred Wu

Tel: +886-2-26557877 Ext: 1732

E-mail: Fredwu@allion.com

<http://www.allion.com/TestTool/USB-test-tool.html>